




Wall panel between two existing walls

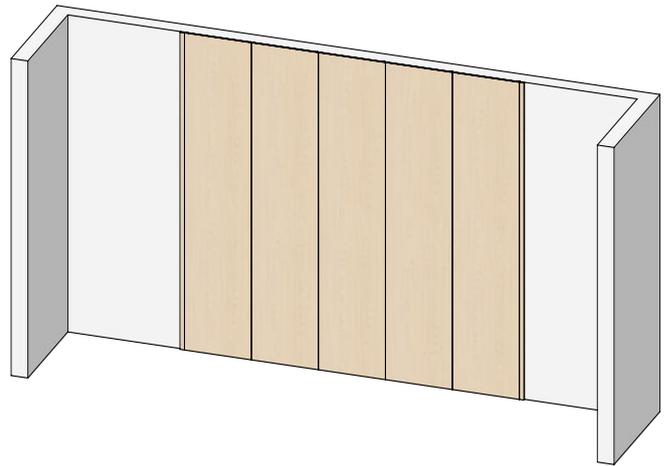

Panels with end strips

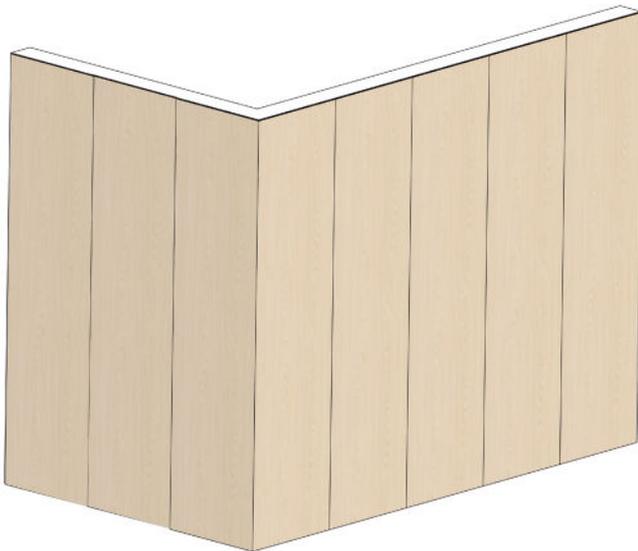

Installing panels with outer corners

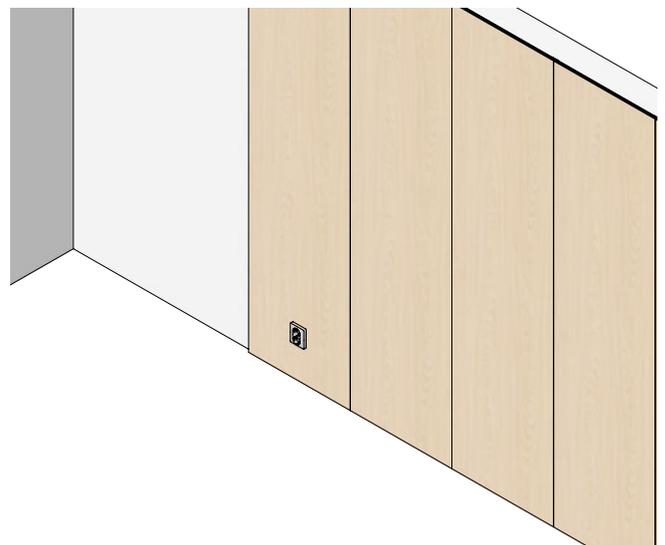


Panels with electrical sockets

# CONTENTS

Tools & Accessories _____	3
Wall panel between two walls _____	4
Panels with end strips _____	9
Installing panels with outer corners _____	12
<b>Installing panels with electrical sockets</b>	
Externally mounted electrical sockets _____	14
Recessed electrical sockets _____	16

## TOOLS NEEDED:

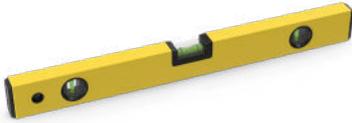
 <p>Circular saw</p>	 <p>Spirit level</p>	 <p>Hack saw (only for LED strips)</p>
 <p>Screwdriver</p>	 <p>Tape measure</p>	 <p>Grab adhesive</p>

## ONLY WHEN INSTALLING ELECTRICAL SOCKETS:

 <p>Compass saw</p>	 <p>Drill (5mm)</p>	 <p>Hole saw drill bit</p>
---	---	---

## OTHER ACCESSORIES

 <p>LED lighting</p>	 <p>Screws</p>	 <p>Tape</p>
---	---	---

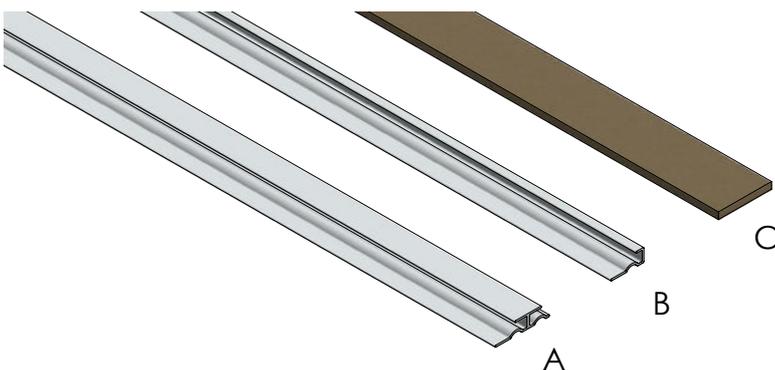

Accessories for installing our wall panels.

- A. JOINT profile
- B. START profile
- C. SPACER strip

# WALL PANEL BETWEEN TWO WALLS WALLRIBBON




1



1. Measure the height of the existing wall. Saw the wall panel at the correct height using a circular saw or a shadow gap saw

2

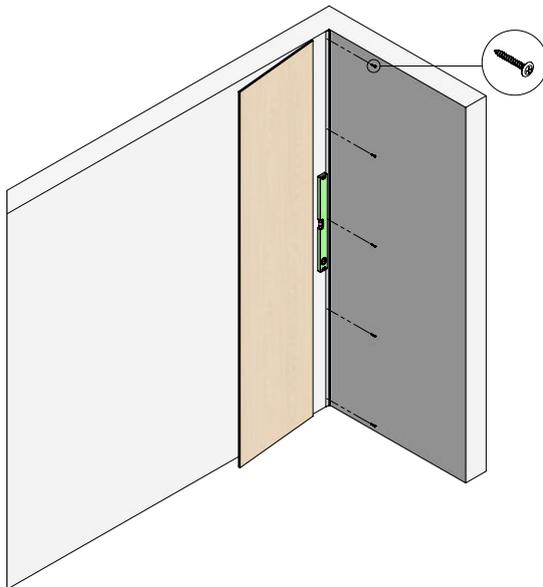


2. When installing between two existing walls, begin by screwing our START profile in place. Make sure the profile is level by using a spirit level. Screw the profile into place keeping 50 mm from the upper edge and the lower edge, then evenly distribute the profiles in-between.

How many screws to use for the START profile: 2,400 mm = 5 screws and 2,960 mm = 6 screws.


Predrill holes in our profiles using a 5 mm drill bit before placing them on the wall.

3

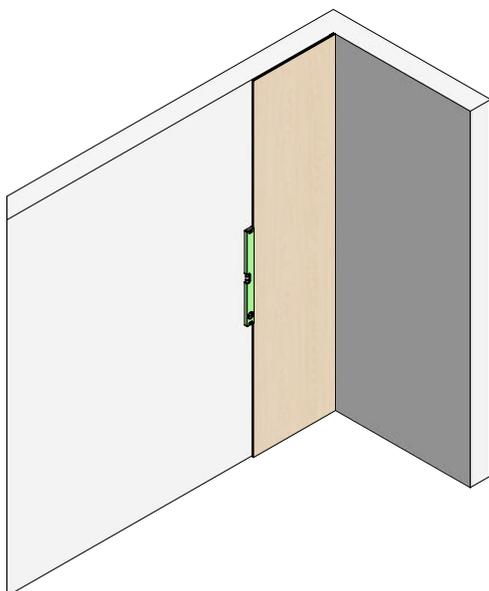


3. Insert the wall panel in the START profile. Double check that the wall panels are level using a spirit level.

**Tip!** Install our JOINT profile before you place the wall panel on the START profile.

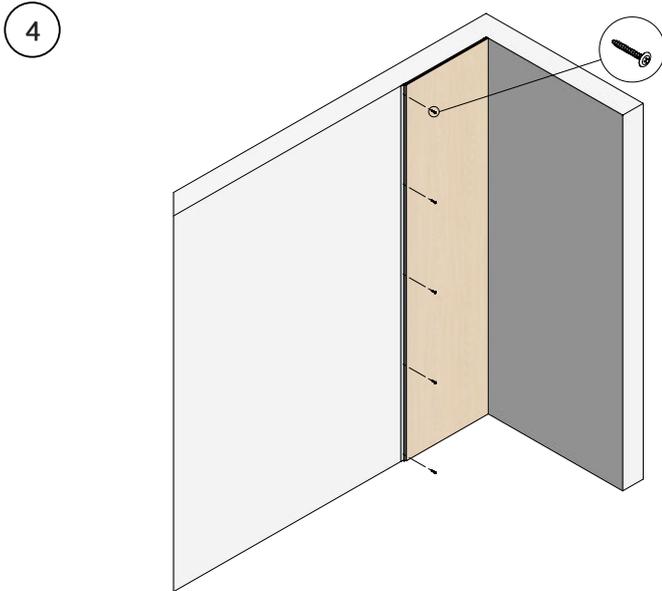


**4.**  
Screw our aluminium JOINT profile onto the wall. Screw it into place keeping 50 mm from the upper edge and the lower edge, then evenly distribute the profiles in-between.

How many screws to use for the JOINT profile: 2,400 mm = 5 screws and 2,960 mm = 6 screws. Pre-drill holes in our profiles using a 5 mm drill bit before placing them on the wall.

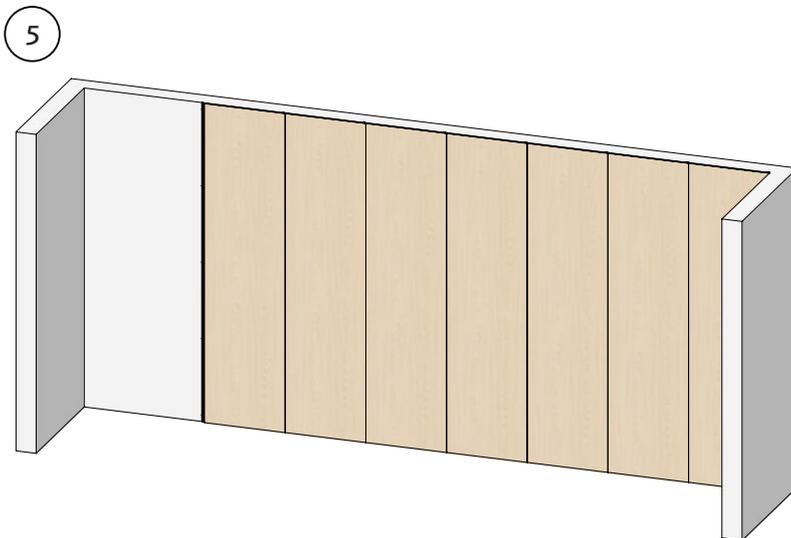


**5.**  
Install the remaining wall panels in the same way using our JOINT profile. Except for the final two wall panels.

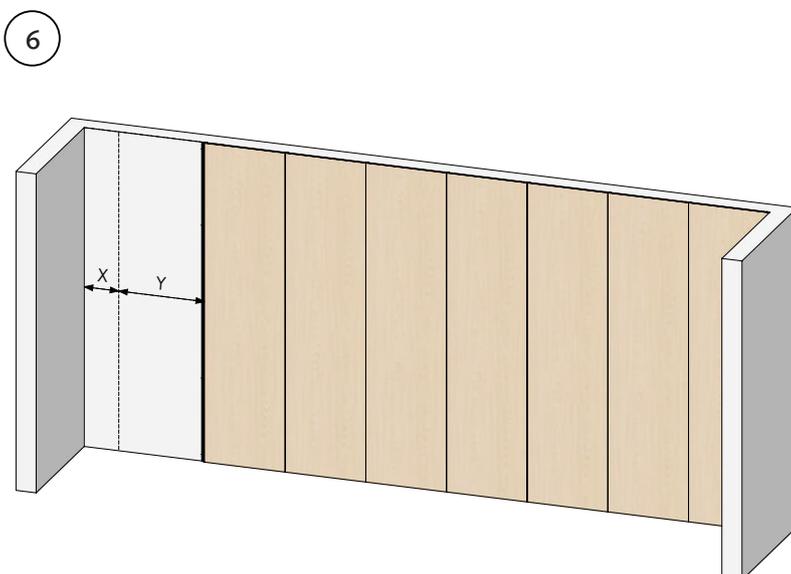

**6.**  
Measure from the existing wall to the wall panel.

7

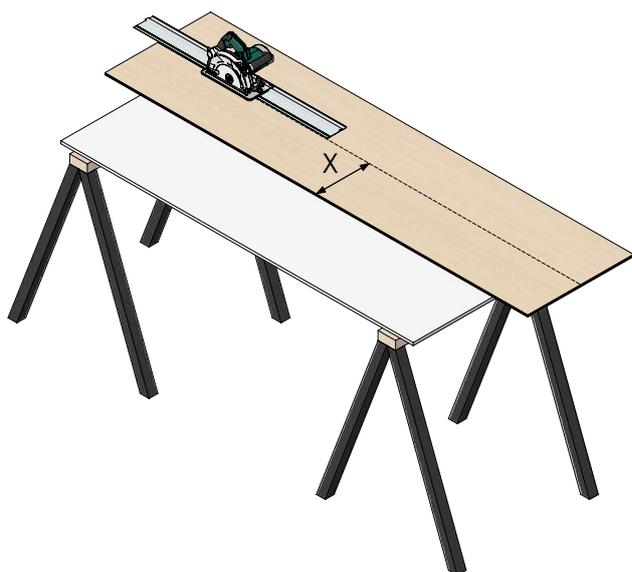

7. Saw the last wall panel at the correct width using a circular saw or a shadow gap saw.

8




8. Loosely fit this together using our JOINT PROFILE.

9




9. Glue the back side of the wall panels using our grab adhesive.


10

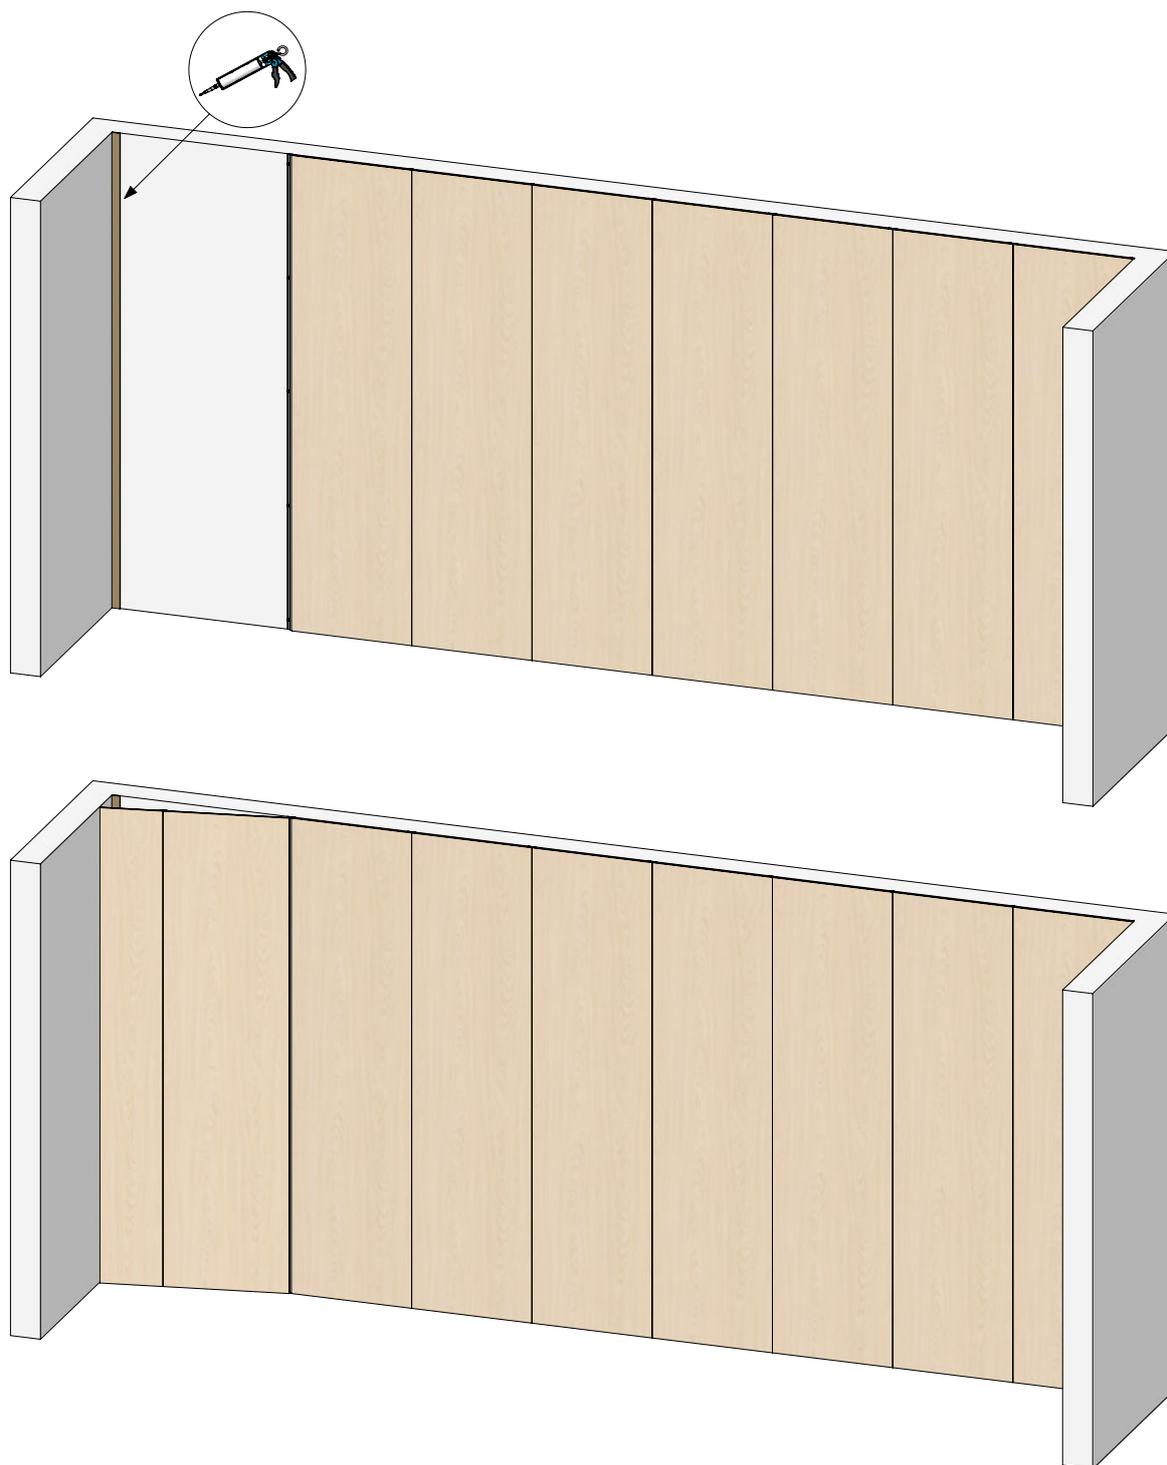

10.  
Fold the two final panels together.

**NOTE!** Do not forget to screw or glue our SPACER strip into place behind the final wall panel beforehand, so that the distance between the wall panel and wall will be correct.

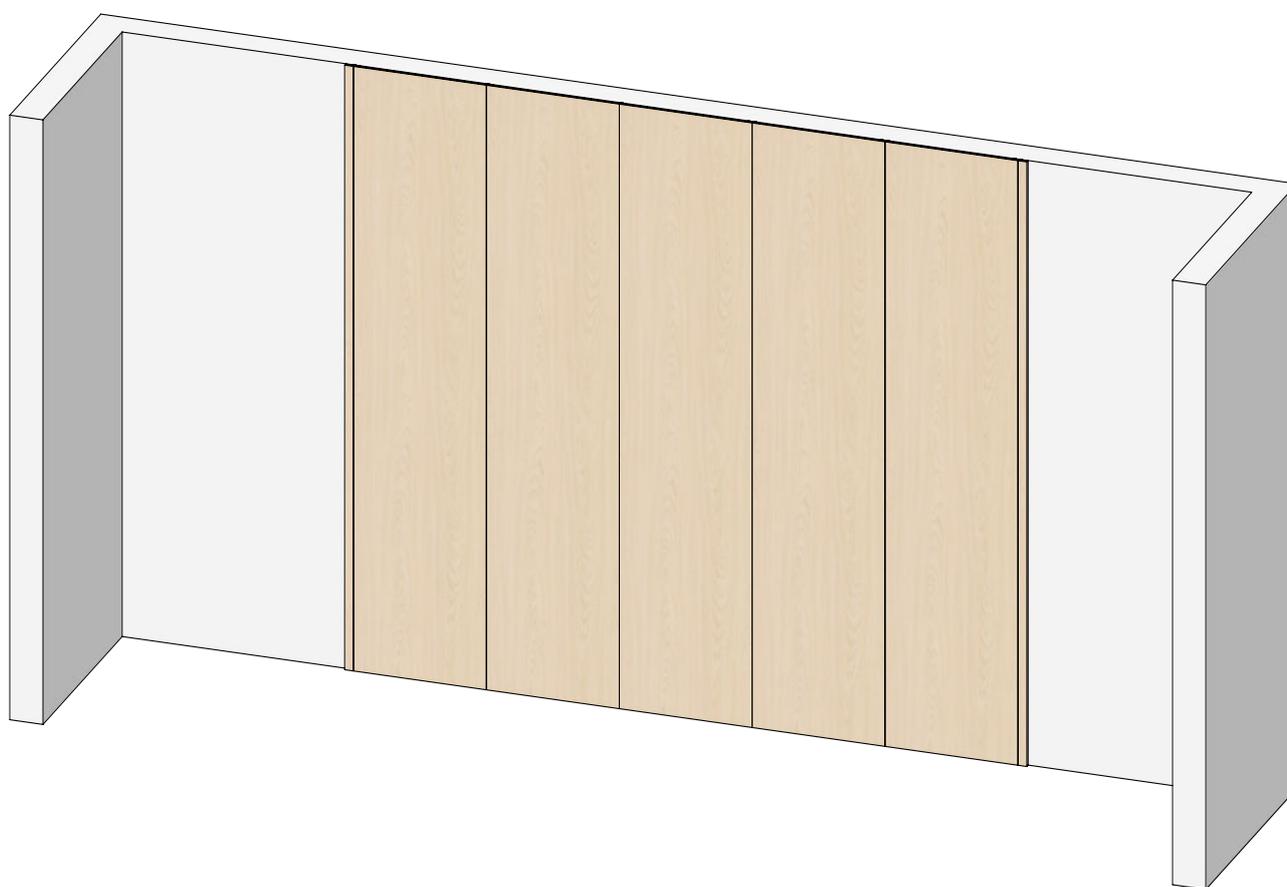

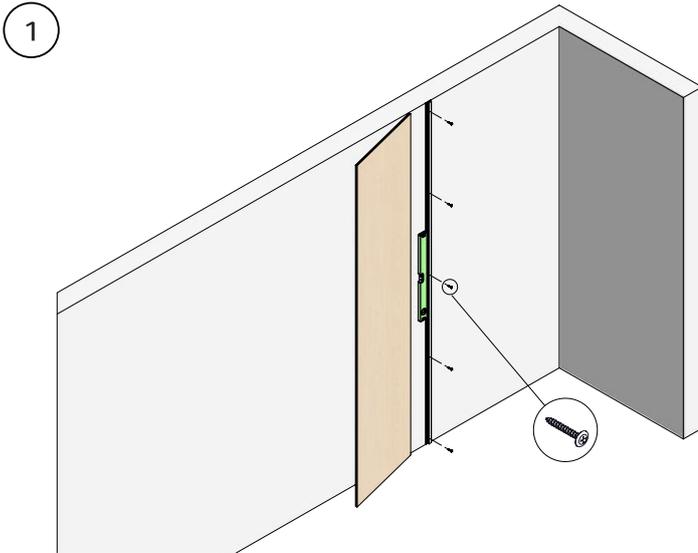


1. Screw our aluminium JOINT profile into place. Make sure the profile is level by using a spirit level.

**NOTE!** Keep in mind that our end strip is 37 mm wide. Screw the JOINT profile into place keeping 50 mm from the upper edge and the lower edge, then evenly distribute the profiles in-between.

How many screws to use for the JOINT profile: 2,400 mm = 5 screws and 2,960 mm = 6 screws. Pre-drill holes in our profiles using a 5 mm drill bit before placing them on the wall.




2. Measure the height of the existing wall. Saw the wall panel and the end strip at the correct height using a circular saw or a shadow gap saw.

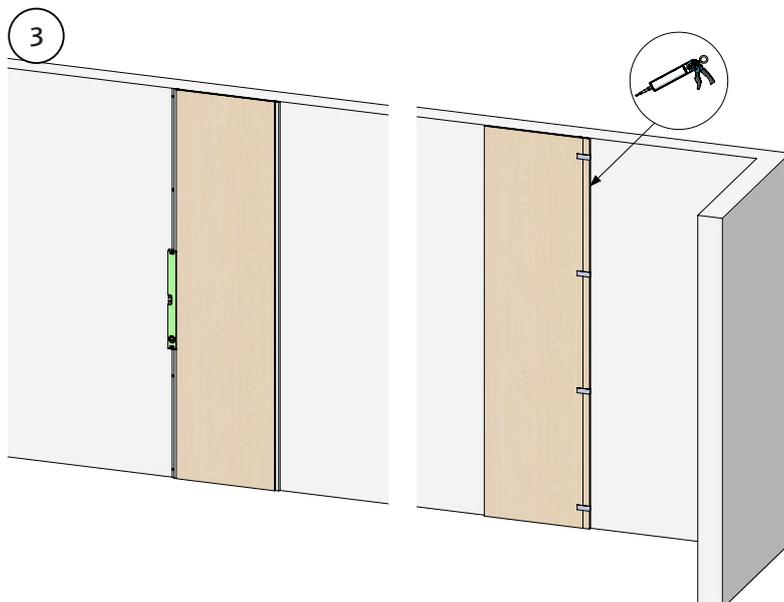

3. Place our grab adhesive on the end strip. Insert it into our JOINT profile.


Tape so that it is firmly placed against our wall panel and allow the glue to cure.

4

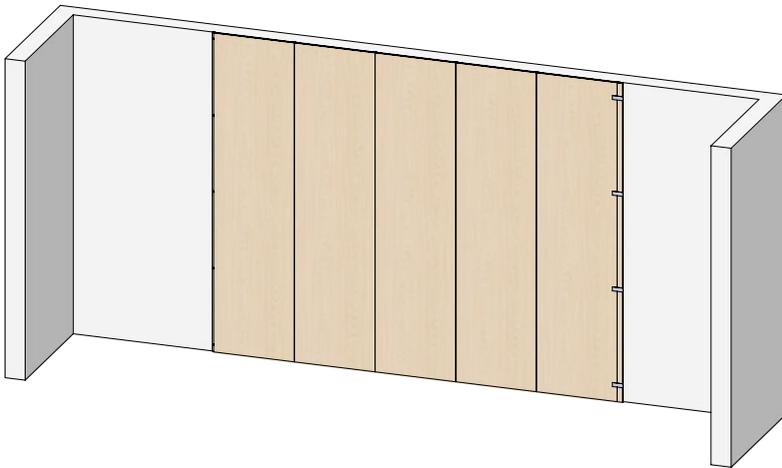

**4.**  
Install the remaining wall panels in the same way using our JOINT profile.

5

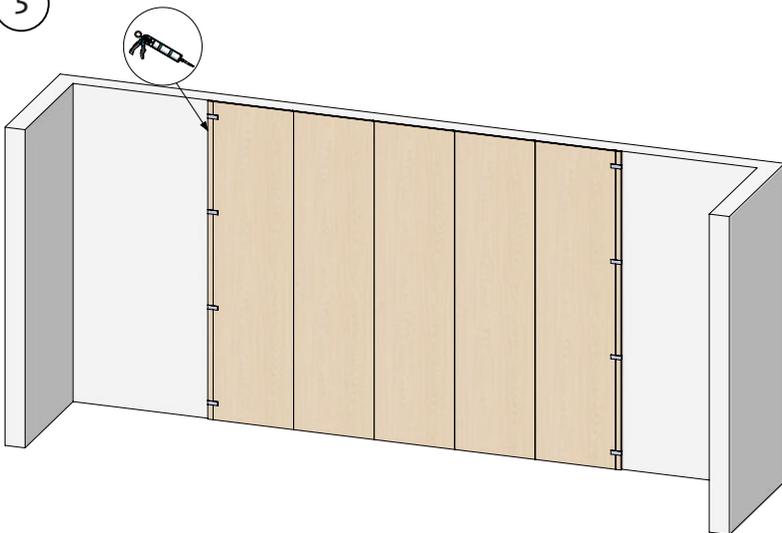

**5.**  
Place our grab adhesive on the end strip. Insert it into our JOINT profile. Tape so that it is firmly placed against our wall panel and allow the glue to cure.




1




1. Installing outer corners. Mitre together the edges of two wall panels in the outer corner. Set the circular saw at 45 degrees and saw the edges.

2

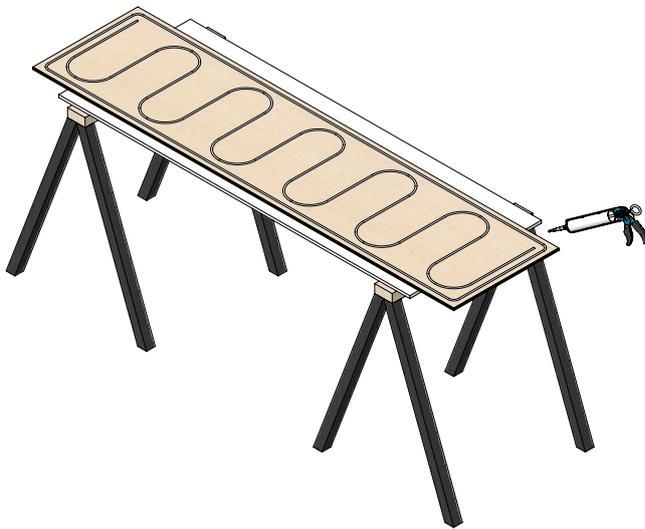


2. Glue the rear side of the wall panel using our grab adhesive.

3

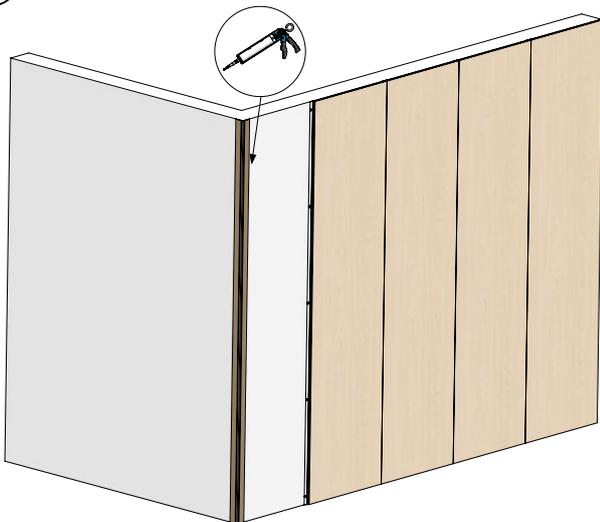

3. Screw or glue our SPACER strip into place before installing our wall panels so that the distance between our wall panel and the wall will be correct.

4

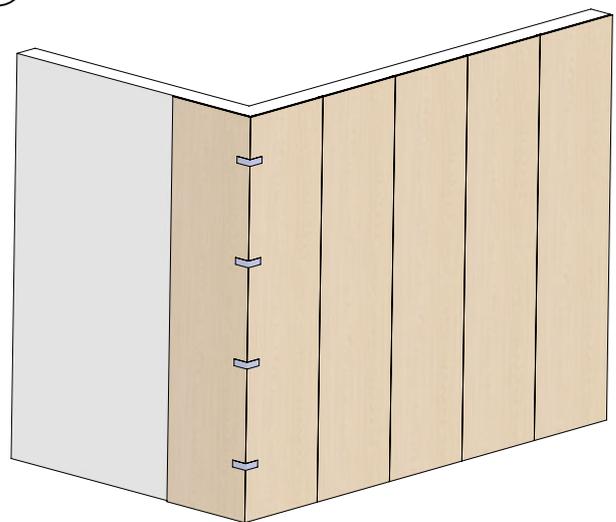




4. Once the panels are in place, tape them and allow the glue to cure.

**Tip!** If possible, begin installing from the outer corner.


# INSTALLING PANELS WITH EXTERNALLY MOUNTED AND RECESSED ELECTRICAL SOCKETS

WALLRIBBON

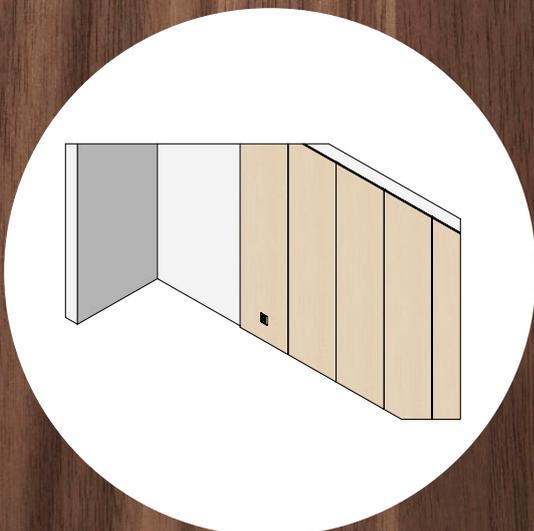


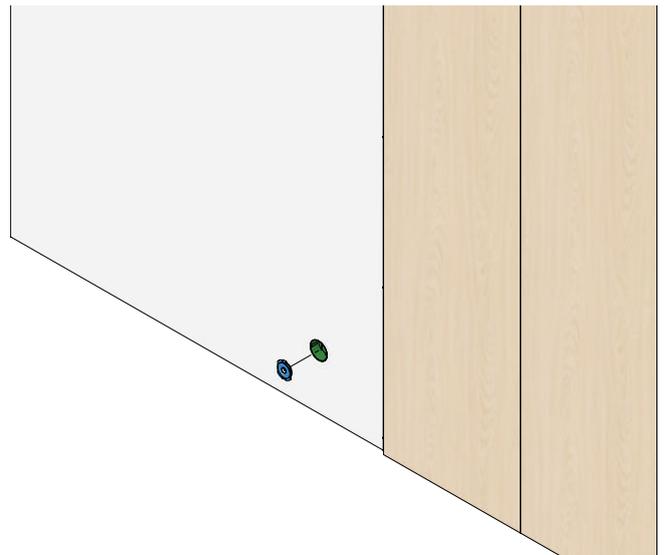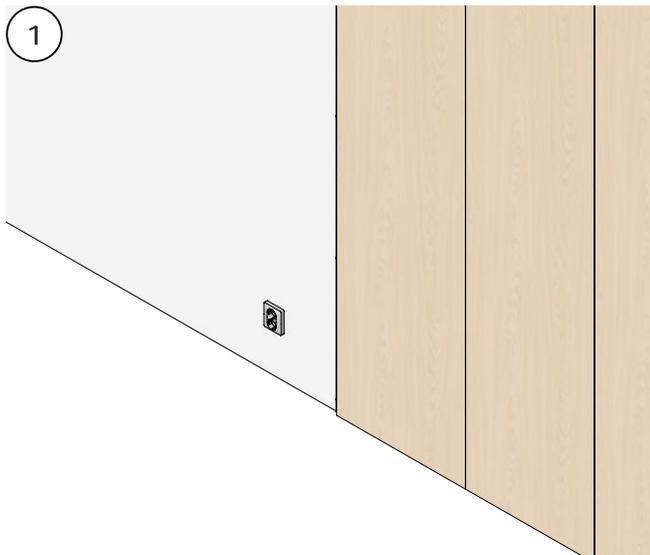


1. Externally mounted Electric switch/Plug socket/Spotlights Remove the electrical socket cover and fit a junction box insert.

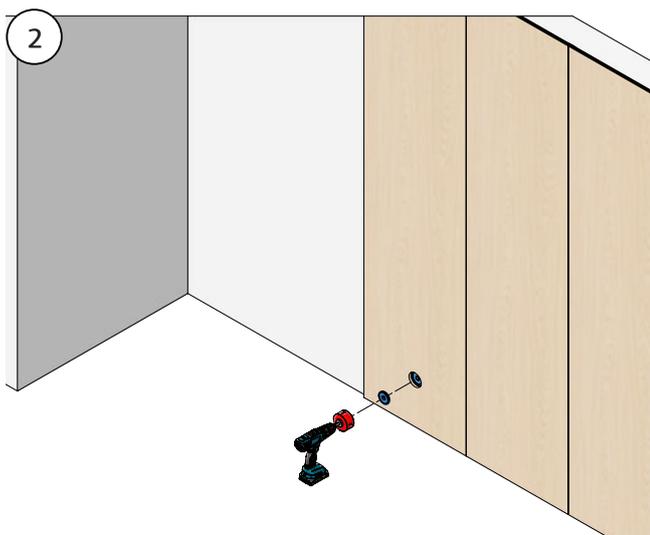


2. Then install the wall panel over the electric switch/plug socket/spotlights. Place the detector there so you can find where to drill the hole. Drill using a hole saw drill bit.

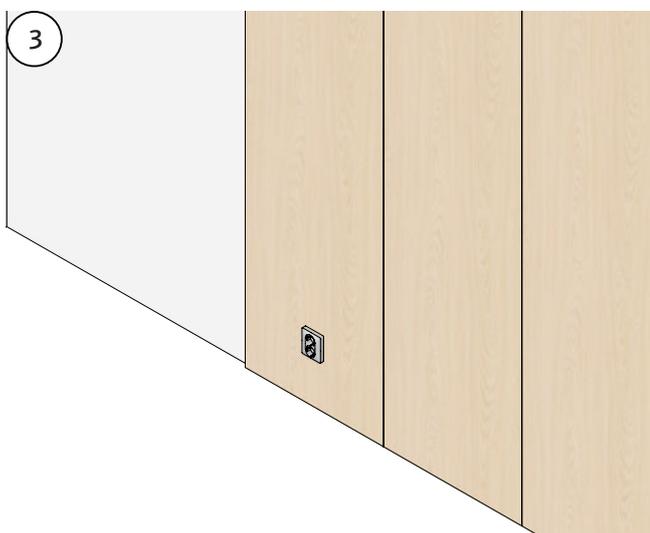


3. Install the electric switch/plug socket/the spotlight.



**EXTERNALLY MOUNTED ELECTRICAL SOCKETS**

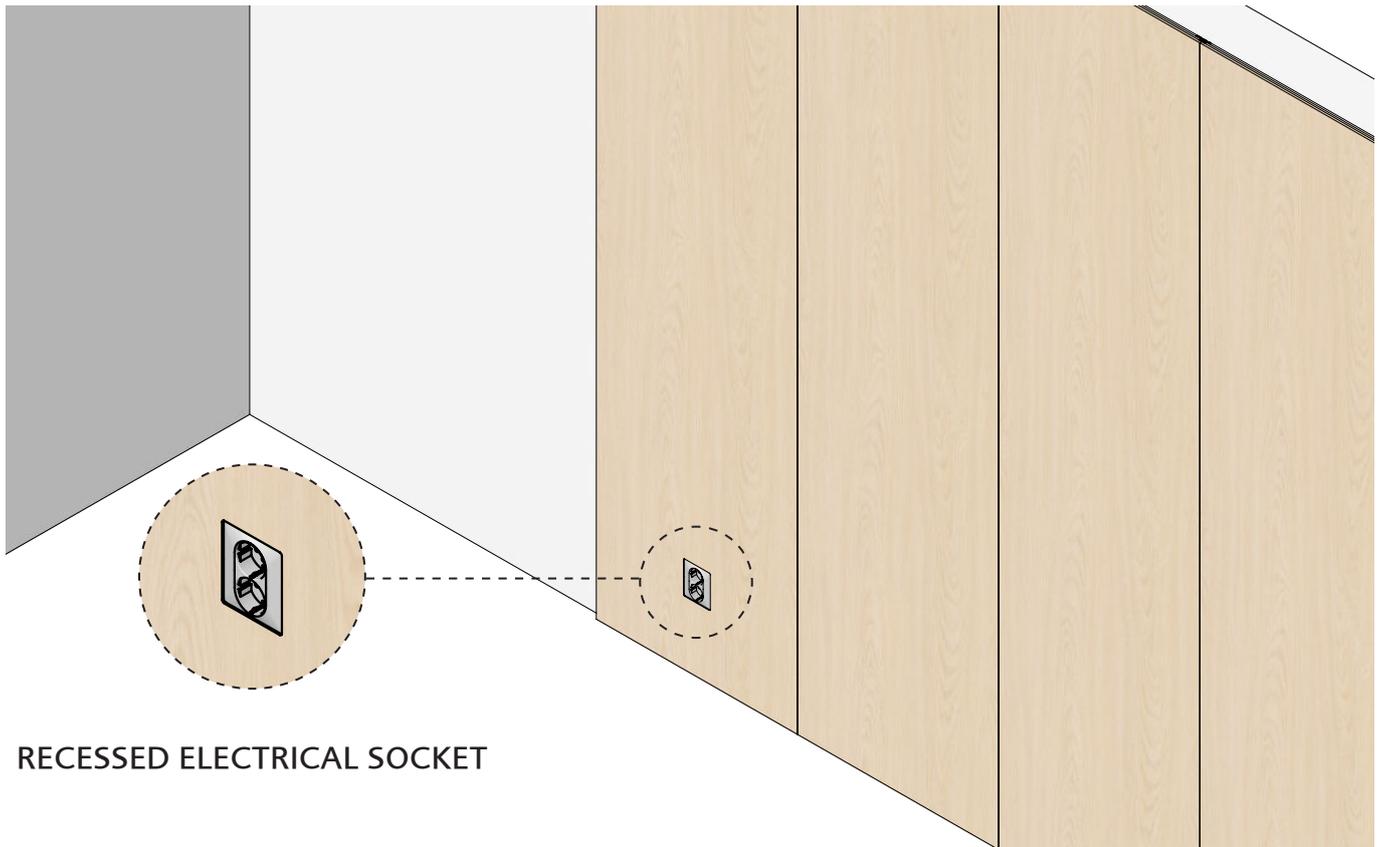

RECESSED ELECTRICAL SOCKET

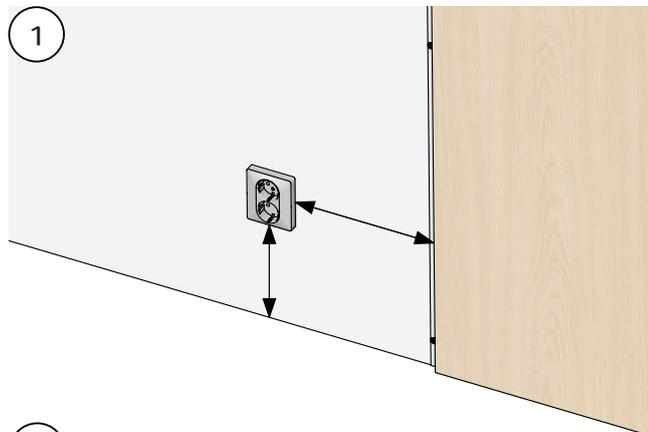

1. Measure where the electric switch/plug socket/ the spotlight is placed on the wall in relation to the wall panel.




2. Transfer the measurements to the panel and saw out a hole using a compass saw.

3



3.  
Glue the panel onto the wall.

4

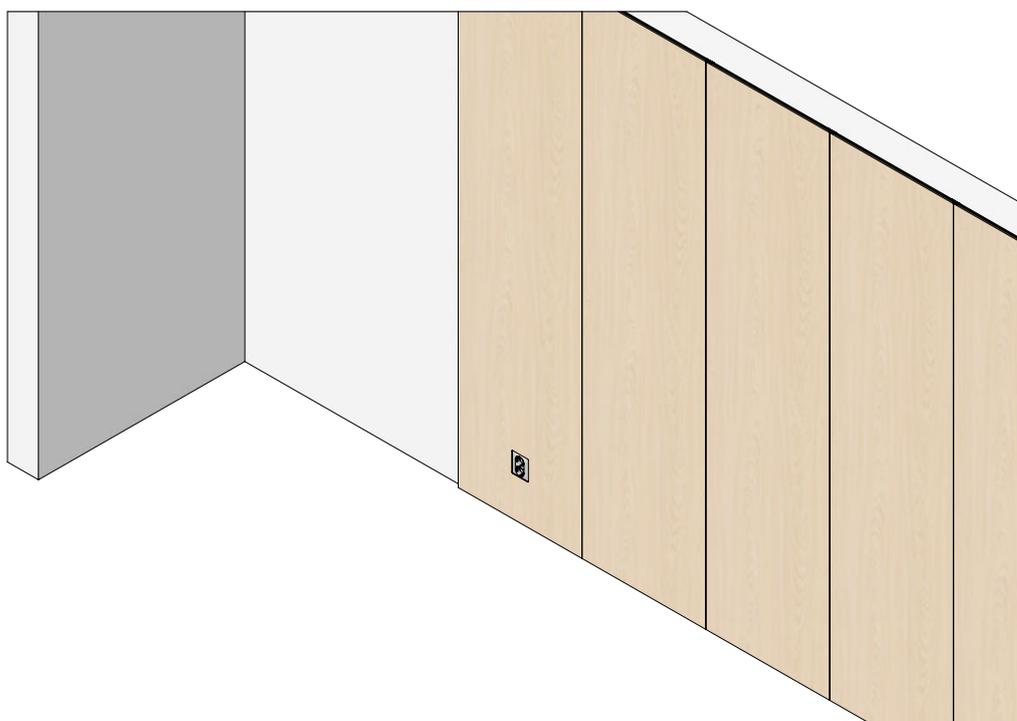

**WALLRIBBON AB**

Box 125 | SE-289 04 Glimåkra

Tel. No: +46 44 454 01

Email: [info@wallribbon.com](mailto:info@wallribbon.com)

Website: [www.wallribbon.com](http://www.wallribbon.com)